

DIECI

////////////////////
**MULTI-WIRE
FOR
THICK AND THIN
SLABS**



PERFORMANCES

DIECI / 700



GREAT STABILITY

The great advantage of multi-wire **BIDESE-QTEQ DIECI / 700** is a great stability. Moreover **handy and fast** in replacing of the diamond wires.



TRIANGLE FRAME DIAMOND WIRE CIRCUIT

Designed with an optimized triangular diamond wires circuit system, multi-wire **BIDESE-QTEQ DIECI / 700** **minimizes the stress** on the diamond wires granting high preformances!



DRUMS AND PULLEYS

Thanks to the well-sized drums and pulleys, multi-wire **BIDESE-QTEQ DIECI / 700** gives **longer life** to the diamond wires and **increases cutting performances**. The cutting precision is warranted by drums guiding wires



PNEUMATIC WIRE TENSIONING

The innovative tensioning system on the multi-wire **BIDESE-QTEQ DIECI / 700** gives many important advantages, like an **optimal contact of the wires** on the stone during the cutting, preventing of the typical problems of oval effect on the wires, cutting deviation and diamond wires breakages.

Pneumatic tensioning **minimizes the service costs** and meets a positive impact to the environment thanks to the absence of oil.



FAST SET UP OF WIRES AND COMPLETELY SAFE

The accessibility to all areas of the multi-wire **QTEQ DIECI / 700** for replacements and set up of diamond wires, **is completely safe**, thanks to the access by stairs with adequate protection, respecting the most rigid safety regulations.




VARIABLE SLABS THICKNESS SETTING

Multi-wire **BIDESE-QTEQ DIECI / 700** is available to produce every thickness of slabs from 2 cm to 30 cm. To set the thickness **easy and fast**, moreover the possibility to adjusts the wires distance, according to different diameter, getting **optimal stone recovery**.

TECHNICAL FEATURES

DIECI / 700

DIECI / 700 multi-wire dimensions (LxWxH):	L: 9.100 x W: 1.940 x H: 6.600 mm
Width of the diamond wires cutting area:	700 mm
Motor flywheel diameter:	ø 1.000 mm
Guiding pulleys diameter:	ø 1.000 mm
Tensioning pulley diameter:	ø 700 mm
Diamond wires guiding wheels diameter:	ø 500 mm
Diamond wires variable rotation speed:	0-35 m/sec.
Diamond wires cutting down feed:	0-300 cm/h
Diamond wires rising speed:	33 cm/min.
Available cutting area: (L x H)	3.800 mm x 2.150 mm
Diamond wires rotation motor power:	55 KW
Motor controlling slow cutting down feed and fast lifting:	5,5 KW
Diameter of the installed diamond wires:	7,3 mm
Installed diamond wires:	n. 10
Pneumatic diamond wire tension:	0-300 kg
Required water quantity:	140 liters/min.
Required compressed air:	80 liters/min (minimum 6 bar)
Thicknesses of the slabs:	20/300 mm
Electric power:	400V - 50 Hz
Weight:	12 Ton.
Diamond wire loop length:	18.900 mm
Installed electrical power:	65 KW
Transport:	n. 1 open top 20 feet

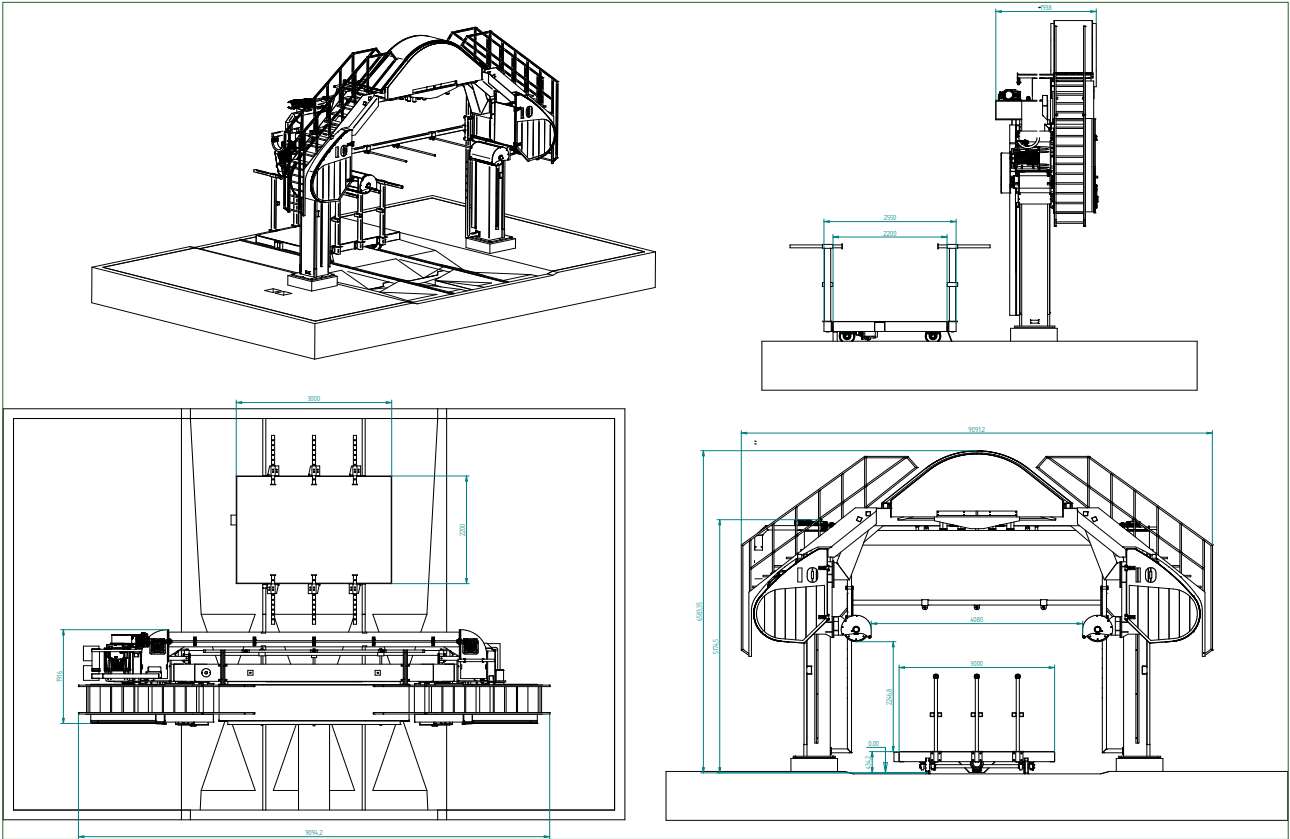



SOLUTIONS FOR
YOUR BUSINESS

Q-TEQ Sp. z o.o.

Jasionka 954
36-002 Jasionka (Poland)
Tel. +48 17 77 962 75

mail: office@qteq.eu
VAT: PL5170365602
www.bidese.com

COPYRIGHT Q-TEQ 2021

The information contained in this catalog are not binding, Q-TEQ reserves the right to make changes without notice, nobody can raise any objections or claim.